


1

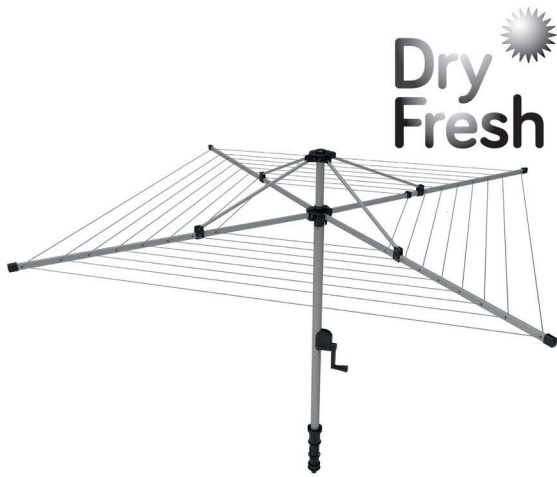

ROTARY FOLDAWAY CLOTHESLINE

Pack Contents:

1. **Lower Pole Assembly** including gear box and ground socket assembly.
2. **Upper Pole Assembly** complete with 4 arm assemblies and pre-strung lines.
3. **Ground Socket Cap** (Used to seal the ground socket when clothesline is removed from ground)


Tool and material required for installation:

- One 10 litre bucket of medium aggregate screenings
- Two 20kg bags of pre-mix concrete
- Three wooden stakes 25mm x 50mm x 400mm
- 3 lengths of medium cord each 2 metres long
- 1 spirit level (approx 500mm long)

2

Preparing the site for your Rotary Foldaway Clothesline

1. Ensure the position selected for hoist foundations has a minimum 2.5m clearance on all sides from the central location. This will prevent longer items (sheet etc) from becoming soiled.
2. Excavate a hole 250mm in diameter x 500mm deep.
3. Backfill the hole with screenings 350mm from ground level. This is necessary to drain rain water that enters via the socket.
4. Position the main tube assembly (as packed complete with ground socket) so that it sits centrally and vertically in the hole. The bottom end of the ground socket will rest on the screening while the top of the ground socket should reach ground level.
5. To retain the ground socket in the central position backfill screening to 325mm from ground level. Ensure no screenings or concrete are in the socket.
6. Position 3 stakes spaced at an equal distance around the hole approximately 1 meter out. Angle the stakes 300mm into the ground.
7. Tie a length of cord from each stake to the main tube assembly to secure vertically. Check the main tube assembly is vertical in two directions using the spirit level.
8. Prepare the pre-mix concrete to a wet, damp mix.
9. Backfill the hole with concrete mix and gently compact the concrete.
10. Ensure the concrete is underneath the top lip of the ground socket.
11. Leave for 24 hours to set concrete before assembling the hoist tube assembly with arms.

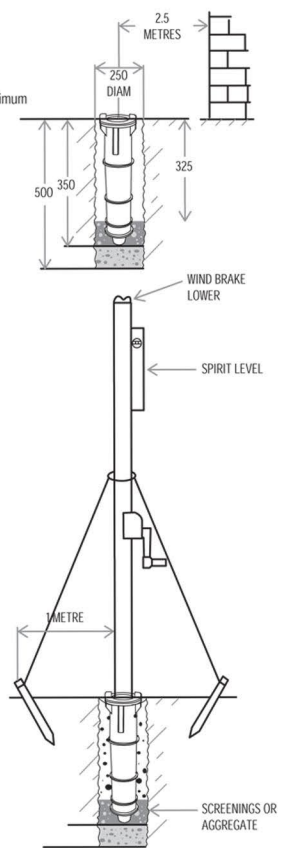


3

Assembling the Clothesline

1. Remove the cord and stabilising stakes.
2. Gently slide the upper pole assembly into the lower pole assembly until the units engage together. The tube assemblies are engaged when both the upper and lower wind brake face meet.
3. Pull arm out of cap slot, this allows arms to be folded out to horizontal position where the latch will lock the arms in place.
4. Turn the handle clockwise to move the hoist up.
5. To activate the wind brake, turn the handle anti-clockwise until the two serrated plastic faces meet.

Please Note: There is a safety clutch within the gear box. When the clothesline is in the maximum lowest or highest positions the handle will rotate freely (clicking sound), which prevents damage to the gear box.

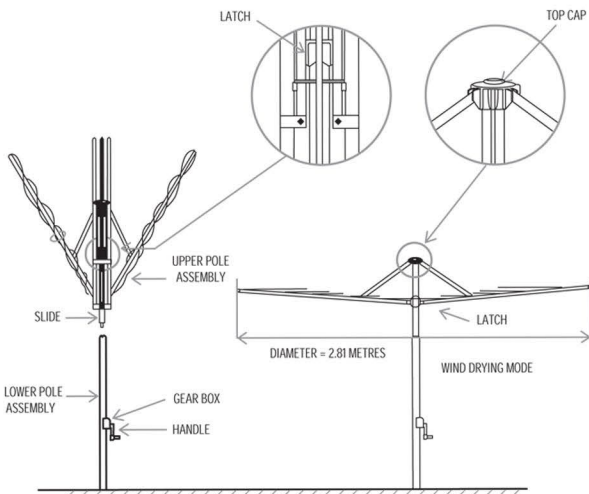

4

Adjusting Clothesline Height

The ideal height of the clothesline should be approximately 100mm from the users head height to the underside of the horizontal arms (with the wind brake engaged).

The clothesline can be adjusted from 1.93 - 2.29 metres by turning the handle clockwise.

To Fold Away Clothesline

1. Wind down the clothesline to the wind brake position.
2. Press the latch inward and slide downwards until all 4 arms are in a vertical position and are secured in the slots located in the top cap.
3. Turn support ring anti-clockwise to unlock ring from ground socket and lift out the clothesline.
4. Insert the ground socket cap for protection while the clothesline is removed.

Helpful Hints

- a) Engage the wind brake mechanism while pegging and unpegging washing. By pulling on the horizontal arm the clothesline will rotate to the next loading position.
- b) Hang washing starting from the inside line with small garments.
- c) Distribute the weight of washing evenly on each line around the four quadrants.
- d) After hanging the washing it is important to wind the line up off the wind brake for spin air drying.

Safety Hints

Please ensure your clothesline is not used as a playing item by children swinging on lines and main arms. Any damage from misuse will void the warranty.

5 Year Product Warranty

Our goods come with warranty that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

If any part of this clothesline fails to operate correctly due to faulty workmanship or defective material DryFresh will repair or replace free of cost within 5 years from the date of purchase. (Receipt of purchase required). The PVC line cord is covered by a 1 year warranty from the date of purchase. Any evidence of misuse or incorrect adjustment will void the warranty. To claim a product warranty please contact DryFresh directly. You must bear the cost of claiming the warranty. This warranty is in addition to other rights and remedies of the customer under law.

info@DryFresh.com.au
www.DryFresh.com.au